Technical Specifications

TELEHOOK

30″-50″ UNIVERSAL ROTATING MOUNT

Ⓐ General Features

Display Compatibility
Suits Displays from 30″ (76cm) to 50″ (127cm)

Display Weight Compatibility
Max. 85kgs (187lbs)

Display Mounting Options
Configuration 1: Suits VESA compliant 100mmx100mm and 100mmx200mm
Configuration 2: Suits 200mm x 200mm to 400mm (8″x8″-15.75″)
Configuration 3: Suits 260mm to 660mm (10.25″-26″) x 200mm to 400mm (8″-15.75″)

Colour
Silver

Warranty
10 years warranty

Security Feature
Padlock Tab: suits max. Ø4mm (0.16″) Shackle. (Padlock Not Included)

Shipping Carton
Dimensions (LxWxH): 768mmx256mmx95mm (30.23″x10.25″x3.75″)
Weight: 8.5kgs (18.7lbs)

Configuration 1:
Mounting Hole Pattern

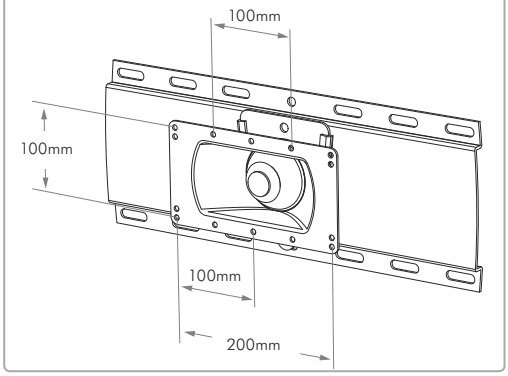

Configuration 2
Mounting Hole Pattern

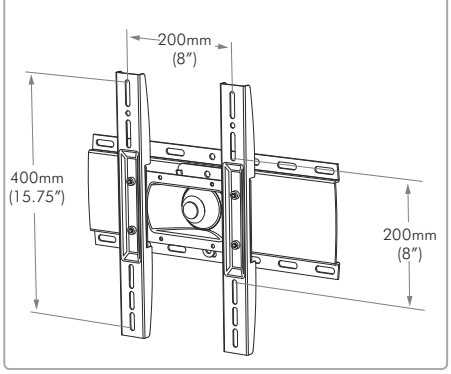

Configuration 3
Minimum and Maximum Mounting Hole Pattern

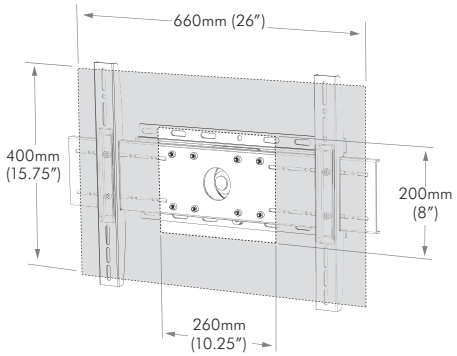

Ⓑ Overall Dimensions

Wall Plate

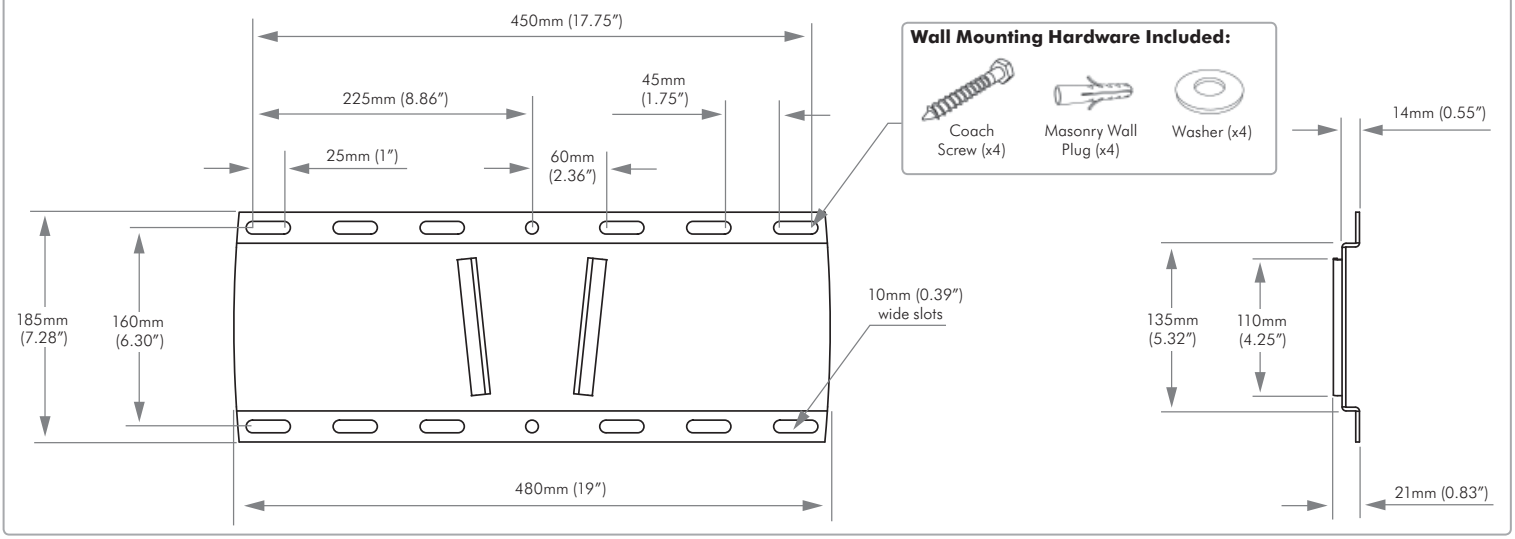

Configuration 1

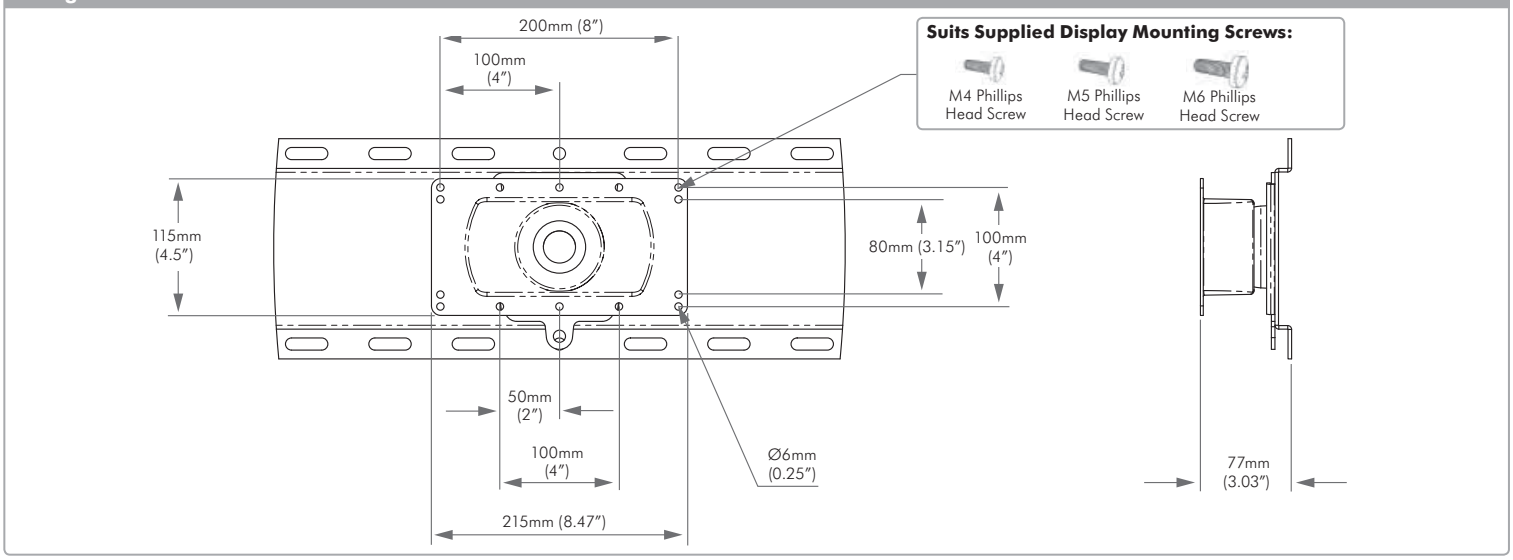

Ⓑ Overall Dimensions

Configuration 2

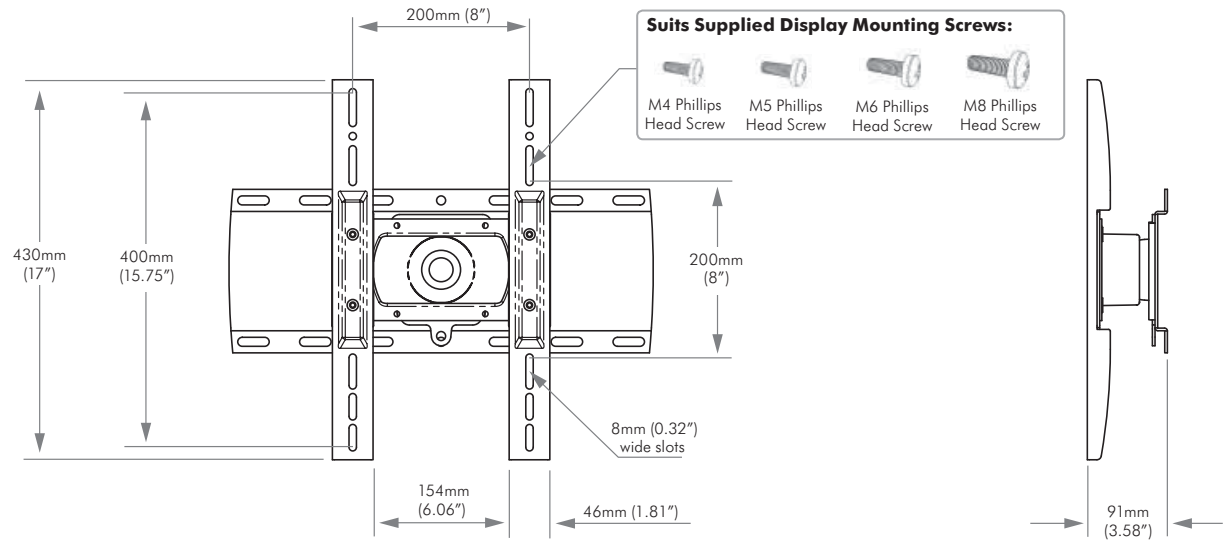

Configuration 3

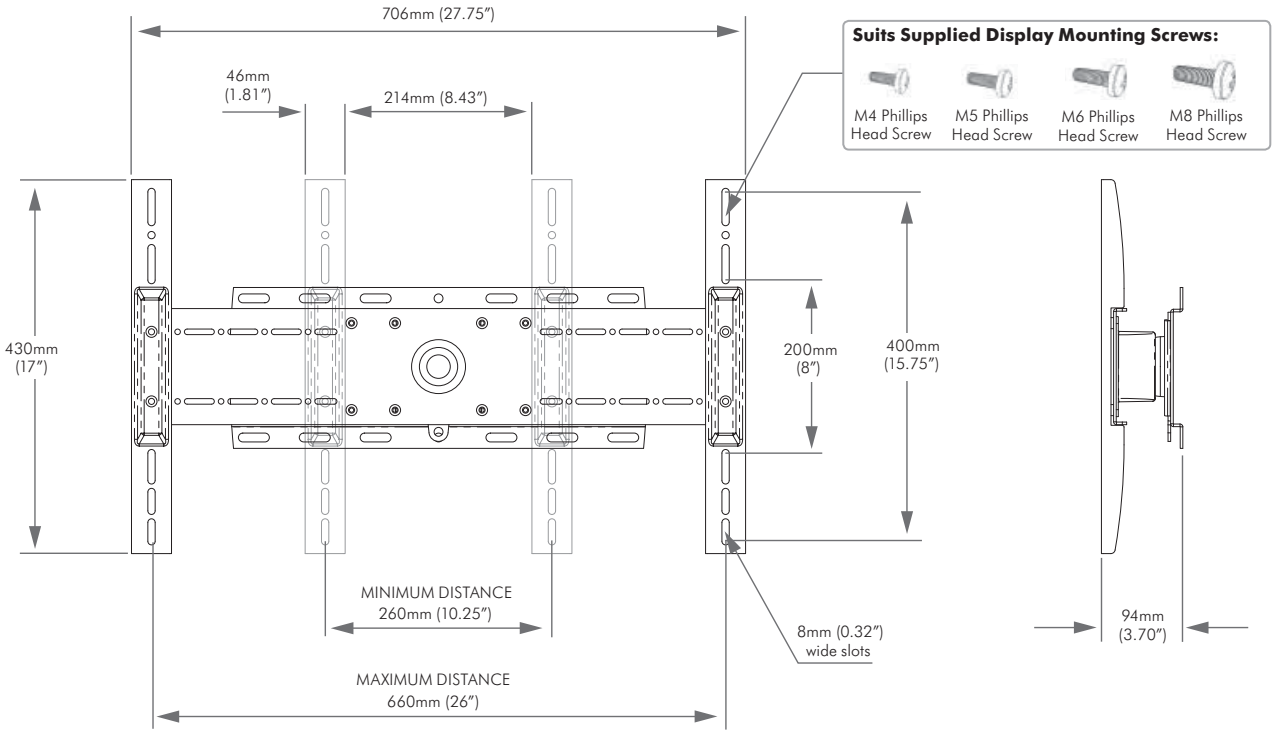

Ⓒ Range of Movement

Range of Movement Settings

All three configurations have identical portrait/landscape rotation of 360 degrees.

Configuration 1:
- Adjustable pan of: ±20°
- Ajustable tilt of: ±20°

Configuration 2:
- Adjustable pan of: ±20°
- Adjustable tilt of : ±20°

Configuration 3:
- Adjustable pan of: ±10°
- Adjustable tilt of: ±20°

Range of movement can be friction set to one-touch adjustment for effortless adjustment, or set to a firmly fixed position.

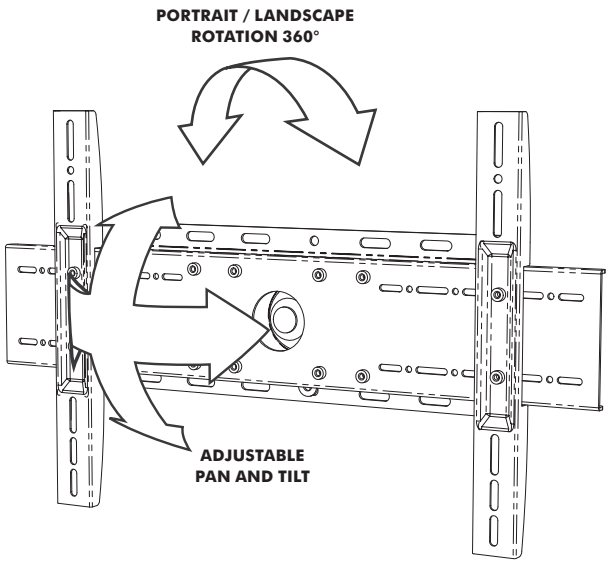

Due to continuing product development, the manufacturer reserves the right to alter specificationswithout notice. Published: 11.04.11 ©